Isolation Amplifier

AD-TV 200 GS

Description

The isolation amplifier AD-TV 200 GS is used for galvanic isolation, amplification and conversion or adaptation of analog measurement signals. Two front-side spindle trimmers can be used to additional adjust the offset (zero) and full scale (span). The integrated wide-range power supply allows operation in a wide supply voltage range with low self-heating.

Application

Galvanic isolation, adapt, amplify and transform analog measurement signals.



Business data

Order number

AD-TV 200 GS

Information

Downloads

Tender text	tv200gs.zip
Safety instructions	ad-safety-instructions.pdf

Technical specifications

Input

Measuring range current	0 ...20 mA; 4 ... 20 mA[1)]
Input resistance	50 Ohm
Measuring range voltage	0 ... 10 V, 2 ... 10 V[1)]
Input resistance	100 kOhm

Output

Output range current	0 ... 20 mA; 4 ... 20 mA[1)]
Max. burden	500 Ohm
Output range voltage	0 ... 10 V; 2 ... 10 V[1)]
Min. burden	1 kOhm
Residual ripple	< 50 mVss

[1)] adjustable; others on request

Housing ST

Dimensions (WxHxD)	23 x 78 x 103 mm
Type of protection	IP 20
Connection method	screw clamp
Terminals, wire cross section	2,5 mm² flex wire / 4 mm² one wire
Bolting torque terminals	0,5 Nm
Weight	~ 120 g
Manner of fastening	35 mm DIN rail 35mm

Transmission behaviour

Basic accuracy	< 0,3 % of full scale
Temperature influence	< 100 ppm/K of full scale

Supply

Supply voltage	20...250 V DC / 50...250 V AC
Nominal voltage	24 V DC / 230 V AC
Power consumption	max 2 W / 3 VA

Environmental conditions

Ambient temperature	-10 ... 50 °C
Storage and transport	-10 ... 70 °C (no condensation)

EMC

Product family standard	EN 61326-1 [2)]
Emitted interference	EN 55011, CISPR11 Cl. B, Gr. 1

[2)] During electromagnetic disturbance minor changes in output signal are possible.

Electrical safety requirements

Product family standard	EN 61010-1
Overvoltage category	II
Pollution degree	2

Galvanic isolation, test voltages

Input/output	3,75 kV RMS (1 min.)
Signal/auxiliary voltage	3 kV RMS (1 min.)

Protective systems

Input/output	electrical surge protection
Power supply	electrical surge and reverse current protection

SALES & ADVICE

GRUBATEC MESS- UND REGELTECHNIK

MANUFACTURER

ADAMCZEWSKI Elektronische Messtechnik

Grubatec AG · Wölferstrasse 5 · CH-4414 Füllinsdorf

+41 55 617 00 80 · info@grubatec.ch · www.grubatec.ch

Subject to technical changes and printing errors.

Isolation Amplifier

AD-TV 200 GS

Block and wiring diagram

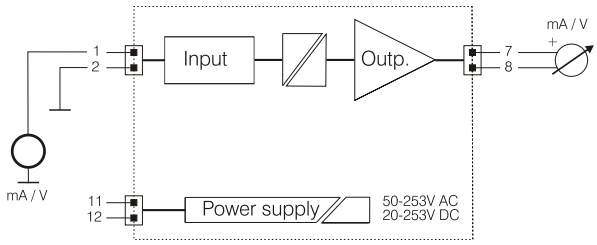

Dimensions

