
Technical Datasheet

KTRD 1465

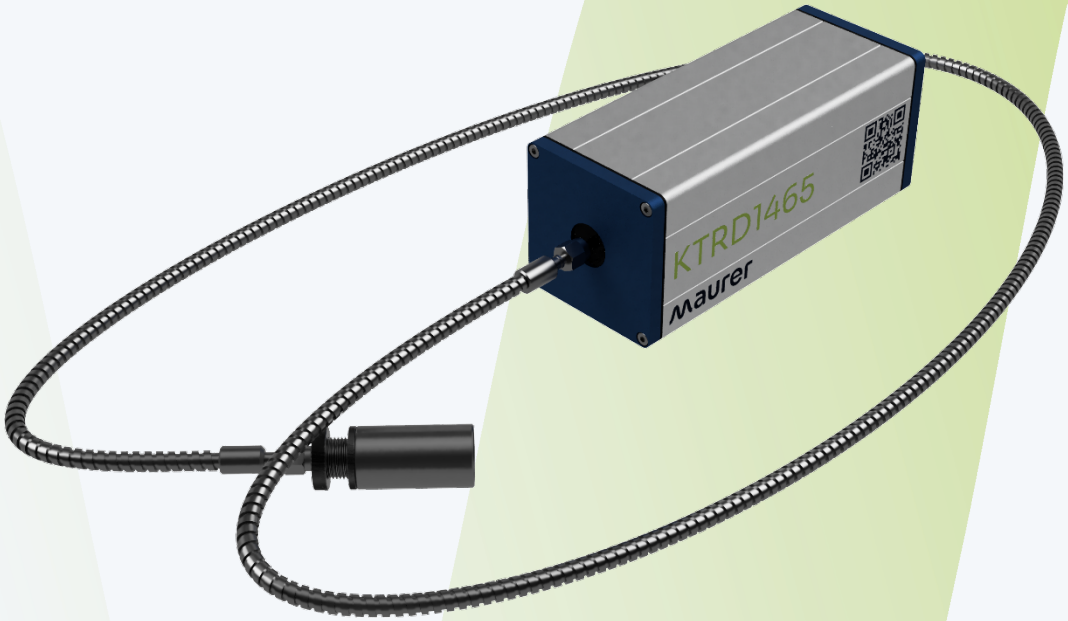

The Flexibility of Fiber Optics

- Fiber optics
- Limited space
- 100–1400 °C
- Flexible mounting

maurer optoelectronics

GRUBATEC MESS- UND REGELTECHNIK

GRUBATEC AG
Gewerbehaus Ergolz, Wölferstrasse 5, 4414 Füllinsdorf
Tel.: +41 (0)55 617 00 80 | www.grubatec.ch | sales@grubatec.ch

Universal Pyrometer

For decades, MAURER has been delivering precise, reliable and adaptable infrared measurement technology. The KTRD 14xx series transmits the measurement signal via a flexible quartz fiber optic cable when the pyrometer cannot be mounted directly due to restricted space. The electronics stay outside the heat zone, the fiber optic cable is heat-resistant up to 150 °C, and three spectral ranges cover metal, glass and ceramic applications.

Steel | Iron | Non-ferrous metals | Wire | Ceramics | Rolling | Induction | Soldering | Welding | Forming | Vacuum furnaces

Uncompromising precision, even in the tightest spaces

- Fiber optic cable and front optics enable measurement at hard-to-reach points
- Electronics stay outside the heat zone, the fiber optic cable itself is heat-resistant up to 150 °C
- Three spectral ranges available for metal, glass and ceramic applications
- Same wide choice of interfaces and software as the standard device without a fiber optic cable

Models KTRD 1465 | KTRD 1475 | KTRD 1485

Technology for hard-to-reach measurement points

- Spectral range: 2.1 µm
- Short response time from under 0.5 ms to 5 ms
- Emissivity of 100 - 10 %, adjustable directly on the device or via interface
- LED target light, precisely matching actual measurement spot in size & position
- With fiber optic cable and optics for exact alignment even in confined spaces
- Usable with digital and analog output
- 1 switching output (open collector)
- Operating voltage 24 V DC
- Free software (IR-LOG) for parameterization, data recording and archiving

Typical Application

On a confined soldering system, the KTRD 1465 transmits the measurement signal via a flexible fiber optic cable to the evaluation unit, since there is no room for the pyrometer itself directly next to the hot solder joint.

Measurement ranges

❶ 100 - 800 °C
❷ 150 - 1200 °C
❸ 200 - 1400 °C

Special ranges on request

GRUBATEC MESS- UND REGELTECHNIK


GRUBATEC AG
Gewerbehaus Ergolz, Wölferstrasse 5, 4414 Füllinsdorf
Tel.: +41 (0)55 617 00 80 | www.grubatec.ch | sales@grubatec.ch

Technical Data

Device types	KTRD 1465
Measurement spot marking	**LED target light**
Response time	Measurement range 1: 5 ms Measurement range 2+3: < 0.5 ms
Spectral range	2,1 µm
Measurement uncertainty	0,5 % ± 1 °C (ε = 1, Tu = 23 °C, T95 = 1 s)
Temperature dependance	0,05 % / °C
Reproducibility	0,1 % ± 1 °C (ε = 1, Tu = 23 °C, T95 = 1 s)
Emissivity	100 - 10 % adjustable on the device or via interface
Resolution	< 0.1 % at the analog output < 0.1 °C at the interface
Analog output	0 - 20 mA or 4 - 20 mA (max. load 500 Ω) adjustable via interface or software
Subranges	freely adjustable within the measuring range
Switching output	24 V / 100 mA (open coll.)
Interface	RS 232 ± 50 V isolated
Device connector	12-pin connector
Operating temperature	0 - 50 °C, Waveguide and optics up to 150 °C
Storage temperature	-10 °C - 70 °C
Permissible humidity	35 - 85 % RH (no condensation)
Supply voltage	24 V DC ± 10 %
Power consumption	< 100 mA
Dimensions (WxHxD) / Weight	54 x 54 x 147 mm / 0.55 kg without fiber optic cable
IP code	IP65
Others	Max. memory, dual memory, adjustable time and threshold value, reset after time, external contact, via software, on new measured object

Wave guide

- Fiber diameter per measurement range
  - Range 1: Ø 0.6 mm
  - Range 2, 3: Ø 0.4 mm
- Quartz fiber optic cable in a metal protective sheath
- Ambient temperature max. 150 °C
- Minimum bend radius = 200 x fiber diameter
- FSMA connectors on both ends for connection to the pyrometer and front optics
- Special lengths and other fibers available on request

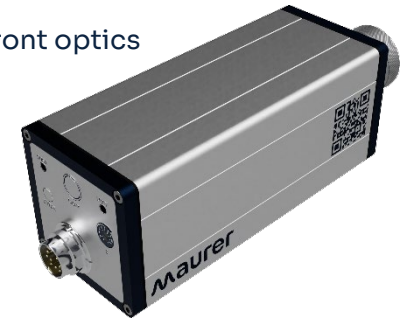

Additional options

- Interfaces: RS 485 ± 70 V isolated,
- PROFIBUS, PROFINET, Ethernet, EtherCAT
- High-speed version: KTRD 1465-HS
- Digital display on the rear of the pyrometer

Electrical add-ons

- Evaluation unit AED 1012
- PC box (USB connection set)
- Various connection cables

Mechanical add-ons


- Mounting bracket
- 90° beam deflector
- Air-purge attachment

GRUBATEC MESS- UND REGELTECHNIK


GRUBATEC AG
Gewerbehaus Ergolz, Wölferstrasse 5, 4414 Füllinsdorf
Tel.: +41 (0)55 617 00 80 | www.grubatec.ch | sales@grubatec.ch

Drawings

KTRD14xx housing with fibre optic cable

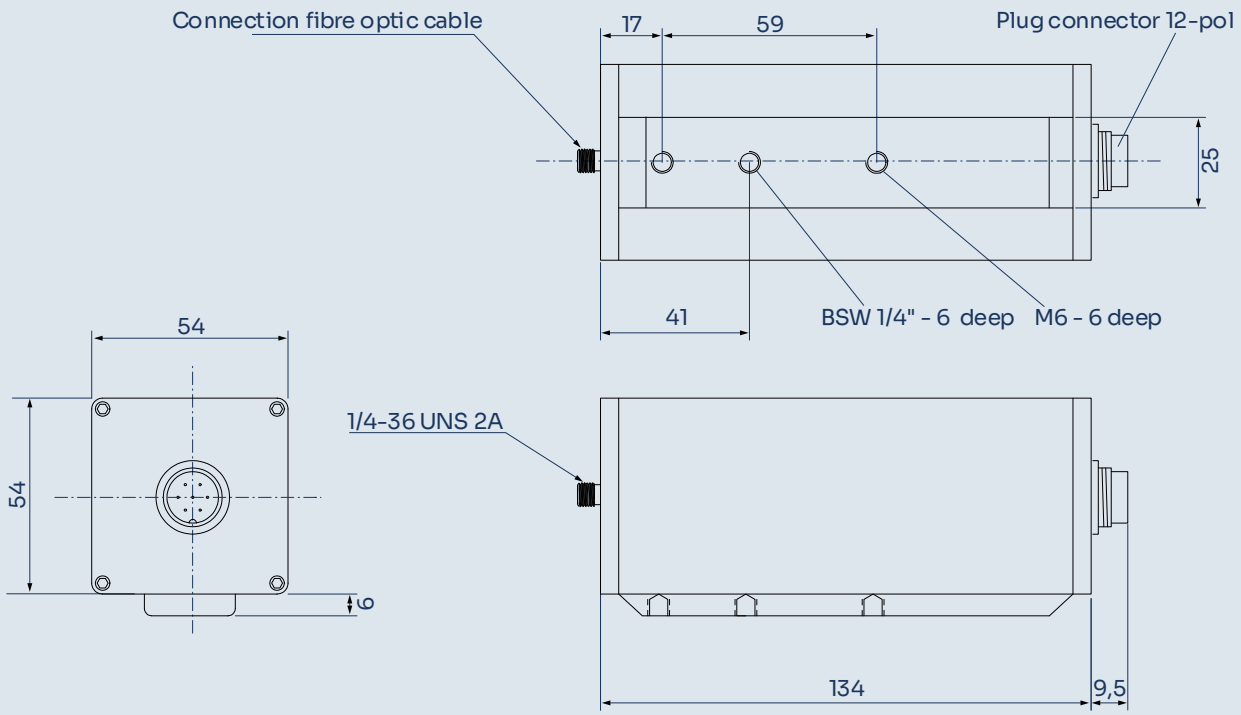


Fiber optics

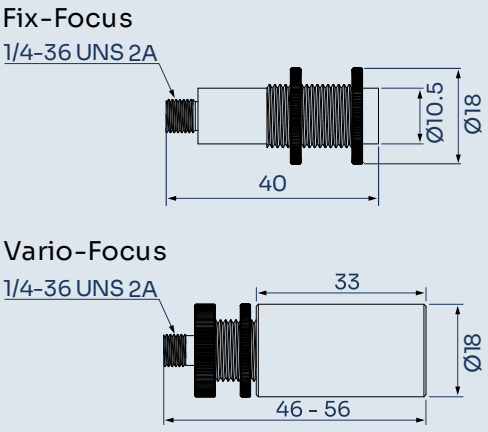

GRUBATEC AG
Gewerbehaus Ergolz, Wölferstrasse 5, 4414 Füllinsdorf
Tel.: +41 (0)55 617 00 80 | www.grubatec.ch | sales@grubatec.ch

Optics

Fix-Focus

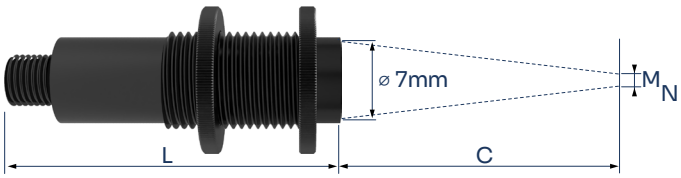

Legend	
L	Length of optics
C	Distance from optics
Mn	Nominal spot size

Optic: VL 50-M 12

Faser D [µm]	C [mm]	L [mm]	Mn [mm]
200	50	38	0,7
400			1,4
600			2

Optic: VL 100-M 12

Faser D [µm]	C [mm]	L [mm]	Mn [mm]
200	100	40	1
400			2
600			3


Optic: VL 150-M 12

Faser D [µm]	C [mm]	L [mm]	Mn [mm]
200	150	38	1,4
400			2,7
600			4

Optic: VL 200-M 12

Faser D [µm]	C [mm]	L [mm]	Mn [mm]
200	200	38	2
400			4
600			6

Vario-focus

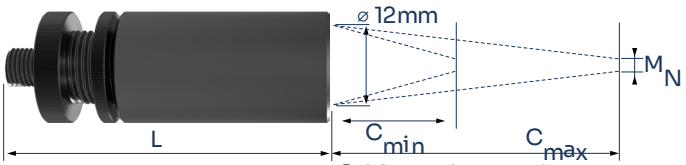

$$\text{Messfleck } M_N = \frac{\text{C Messabstand}}{\text{R Ratio}}$$

Legend	
L	Length of optics
Cmin	Minimum distance from optics
Cmax	Maximum distance from optics
Mn	Nominal spot size

Optic: VL-VA N - Cmin=64mm / Cmax=160mm

Faser D [µm]	Ratio	C [mm]	L [mm]	Mn [mm]
200	138	64	56	0,5
		160	46	1,2
400	69	64	56	0,9
		160	46	2,3
600	46	64	56	1,4
		160	46	3,5

Optic: VL-VA T - Cmin=100mm / Cmax=5000mm

Faser D [µm]	Ratio	C [mm]	L [mm]	Mn [mm]
200	150	100	56	0,4
		5000	46	1,1
400	75	100	56	0,9
		5000	46	2,1
600	50	100	56	1,3
		5000	46	3,2

GRUBATEC AG
Gewerbehaus Ergolz, Wölferstrasse 5, 4414 Füllinsdorf
Tel.: +41 (0)55 617 00 80 | www.grubatec.ch | sales@grubatec.ch